

# Stream series

Designed to deliver best-in-class performance



Copeland Stream compressors are a line of 4 and 6 cylinder semi-hermetic compressors. The series provides best in class performance for today's HFCs, HFO blends with lower-GWP values, and natural refrigerants, significantly reducing the cost of operation and environmental impact compared to competing products.

With advanced protection and diagnostics features for system reliability, reduced service costs and increased equipment uptime, the Copeland Stream series is built to last in today's modern changing world.

### The Stream series features an extended model line-up...

- Range of 8 models from 62 to 153 m<sup>3</sup>/h for A1 HFC/HFOs with lower GWP
- Availability with wide range of refrigerants: R448A, R449A, R407A/F/C, R513A, R450A, R134a and R404A
- Range of 9 models for CO<sub>2</sub> transcritical and 6 models for CO<sub>2</sub> subcritical applications requiring high standstill pressures above 60bar – see separate DSH120 leaflet


### ... With impressive technical highlights

- Best-in-class seasonal efficiencies, up to 15% higher than semi-hermetic reciprocating compressors known in the market
- Reduced sound level for quiet operation up to 7dBA
- Reduced dimensions and weight by up to 45 kg
- Wide operating envelope, one model fits all refrigeration applications, medium and low temperature
- Availability of two motor versions per displacement
- No cooling fan required for low temperature (0°C suction gas return temperature) to keep applied cost low
- Extremely low condensing temperatures for increased system efficiency
- Emerson CoreSense™ Diagnostics technology providing advanced protection & diagnostics to ensure long compressor lifetime
  - Protection and sensing devices pre-installed to reduce applied system cost
  - Current sensor allowing for individual compressor power monitoring to stay on top of energy costs
  - Integrated status LEDs for local communication via colour and flash codes
- Remote communication via Modbus® for faster service
- For CoreSense Diagnostics see separate leaflet for full details (DSH121)
- Availability of the new demand cooling system for 4 and 6 cylinder Stream compressors to cover low GWP refrigerants for low temperature applications

All Stream compressors are released for two different options of capacity modulation:



- Variable speed release from 30 to 70 Hz for capacity modulation related energy savings
- Continuous modulation from 50–100% (4-cylinder) and 33–100% (6-cylinder) ensuring a perfect match of capacity to refrigeration load

### Stream line-up


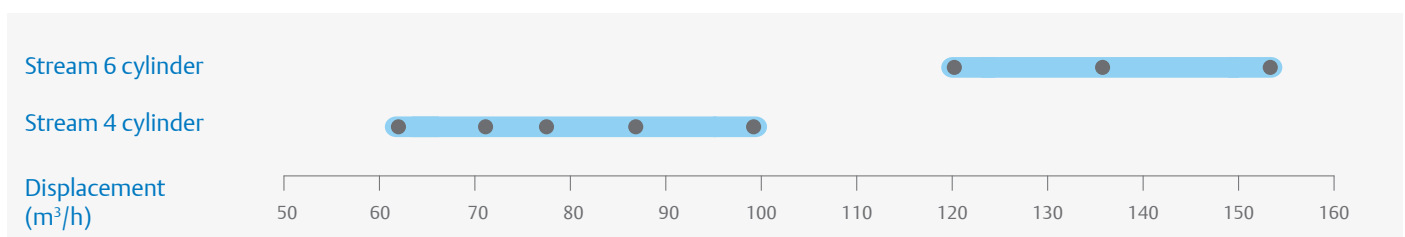


# Operating envelopes Stream series



## R448A/R449A

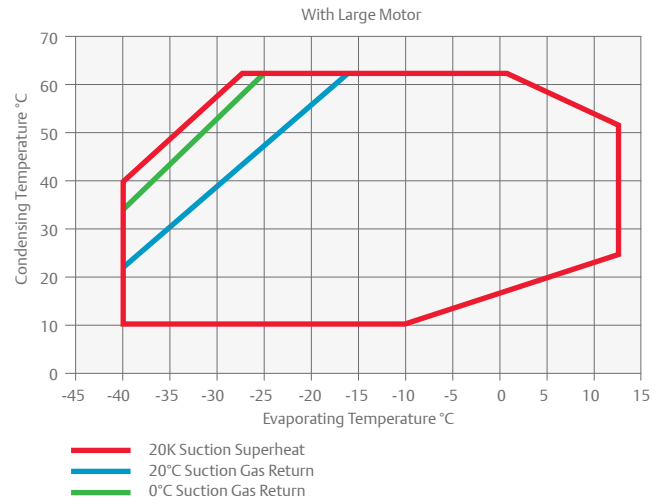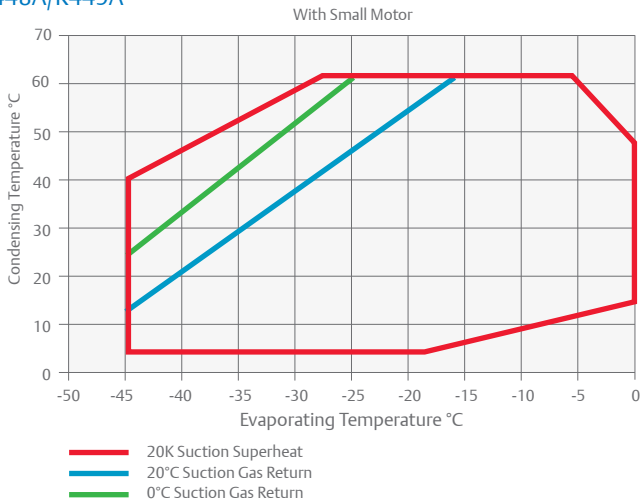


## R407A

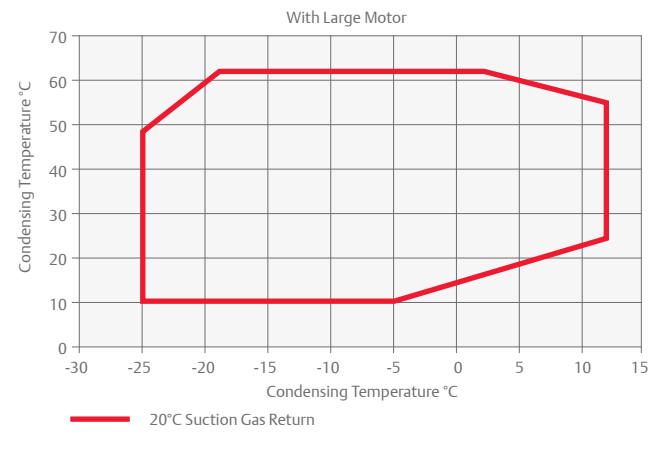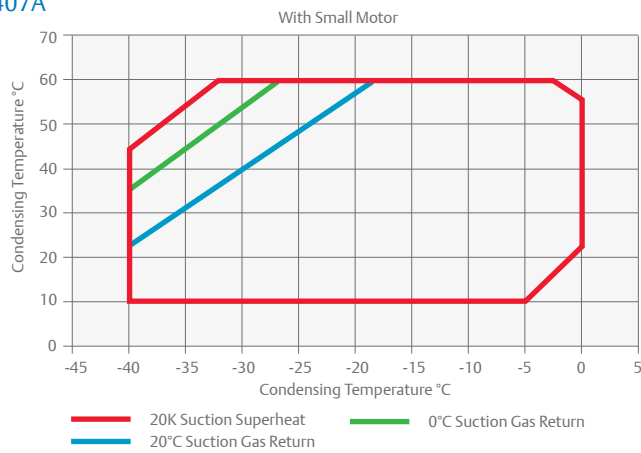


## R134a

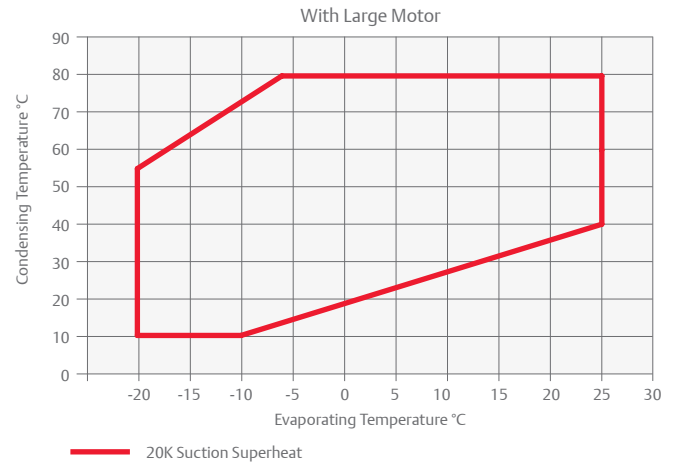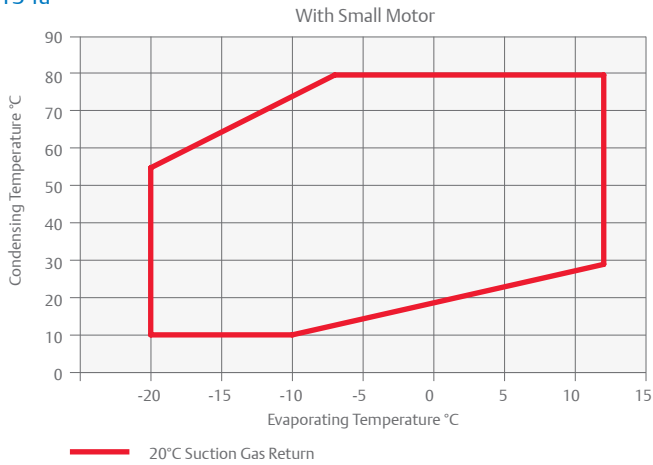

## R450A

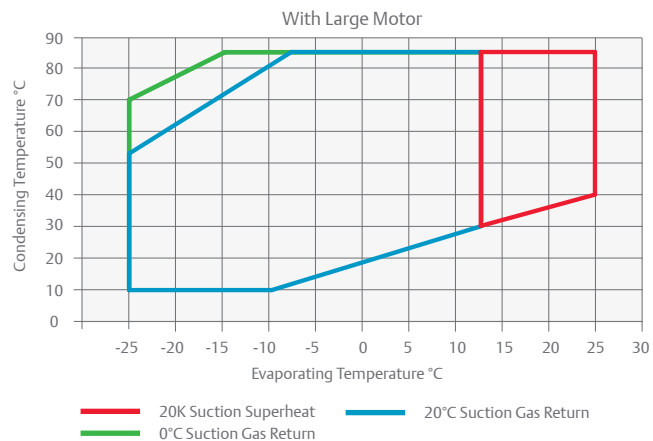

## R513A

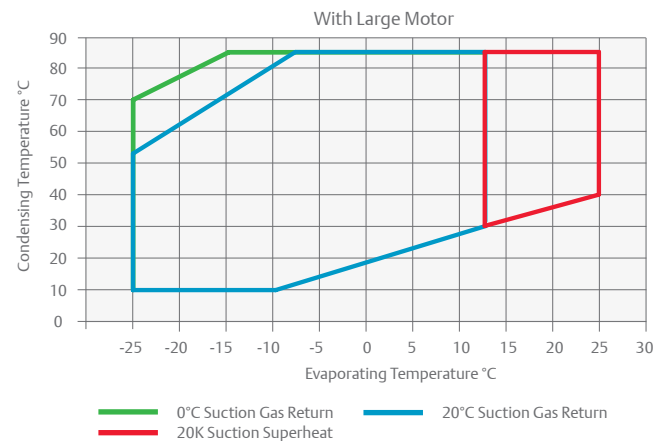



## Technical overview Stream

Model	Nominal horsepower (hp)	Displacement (m³/h)	Medium temperature														Low temperature				Weight (kg)	Footprint (mm x mm)		
			Cooling capacity (kW)							COP							Cooling capacity (kW)		COP					
			R404A*	R134a*	R407F*	R407A*	R448A/ R449A*	R450A*	R513A*	R404A*	R134a*	R407F*	R407A*	R448A/ R449A*	R450A*	R513A*	R404A**	R407F**	R448A/ R449A**	R404A**			R407F**	R448A/ R449A**
4MF-13X	13	62	31.6	18.9	28.8	28.8	28.0	16.8	20.8	2.3	2.5	2.4	2.3	2.2	2.5	2.6	8.9	8.0	8.3	1.2	1.2	1.3	177	381 x 305
4MA-22X	22	62	32.7	19.9	30.1	30.1	31.8	16.7	20.9	2.4	2.6	2.5	2.5	2.5	2.5	2.6	8.7		7.9	1.2	1.8	1.3	177	
4ML-15X	15	71	38.4	22.9	34.9	35.3	36.1	20.0	24.1	2.3	2.5	2.4	2.4	2.4	2.5	2.5	11.3	10.1	10.6	1.3	1.3	1.4	180	
4MH-25X	25	71	38.5	22.9	35.3	35.1	36.2	19.0	23.8	2.4	2.5	2.5	2.4	2.4	2.4	2.5	10.3		9.6	1.2	1.8	1.3	187	
4MM-20X	20	78	42.0	25.2	38.7	38.7	39.4	21.7	26.5	2.3	2.6	2.4	2.4	2.4	2.5	2.5	12.9	11.2	11.9	1.3	1.3	1.4	182	
4MI-30X	30	78	42.8	25.3	38.6	39.1	41.0	20.9	26.7	2.4	2.6	2.5	2.4	2.5	2.4	2.6	12.2		10.9	1.3	1.8	1.3	188	
4MT-22X	22	88	47.6	28.8	41.5	41.5	44.5	23.9	29.6	2.3	2.5	2.5	2.2	2.4	2.4	2.5	14.5	13.0	13.6	1.3	1.3	1.4	183	
4MJ-33X	33	88	47.6	28.3	43.4	43.4	45.1	22.8	29.0	2.4	2.6	2.5	2.4	2.4	2.7	2.5	13.7		12.3	1.3	1.8	1.3	190	
4MU-25X	25	99	53.1	31.7	47.2	47.2	49.4	26.6	32.9	2.3	2.5	2.4	2.3	2.3	2.4	2.4	15.9	14.4	14.5	1.2	1.3	1.4	186	
4MK-35X	32	99	53.5	31.8	48.8	48.8	50.7	26.7	32.4	2.3	2.5	2.4	2.4	2.4	2.4	2.4	15.5		13.9	1.2	1.7	1.3	202	
6MM-30X	27	120	64.2	38.2	57.5	57.5	59.0	32.7	39.9	2.3	2.5	2.4	2.3	2.3	2.4	2.4	19.4	17.6	17.8	1.2	1.3	1.4	215	
6MI-40X	35	120	64.6	37.4	59.7	59.7	61.9	32.3	38.5	2.3	2.4	2.5	2.4	2.5	2.4	2.4	18.5		17.3	1.2	1.7	1.3	219	
6MT-35X	32	135	72.4	43.1	66.0	66.0	65.3	36.9	45.9	2.3	2.5	2.4	2.3	2.3	2.4	2.7	21.8	20.2	20.0	1.3	1.3	1.4	221	
6MJ-45X	40	135	72.4	42.4	66.3	66.3	69.1	36.4	44.9	2.3	2.5	2.4	2.4	2.4	2.5	2.5	21.1		19.8	1.2	1.7	1.4	223	
6MU-40X	40	153	81.4	47.5	77.5	73.1	76.3	42.1	49.1	2.3	2.5	2.4	2.3	2.4	2.5	2.4	24.2	21.0	22.5	1.2	1.2	1.4	225	
6MK-50X	50	153	80.9	45.7	79.1	74.0	76.4	39.5	48.3	2.3	2.3	2.4	2.4	2.4	2.3	2.4	23.0		21.4	1.2	1.7	1.3	230	

\* Evaporating -10°C, condensing 45°C, suction gas return 20°C, subcooling 0K

\*\* Evaporating -35°C, condensing 40°C, superheat 20K, subcooling 0K

**For more details, see [climate.emerson.com/en-gb](https://climate.emerson.com/en-gb)**

Emerson Commercial & Residential Solutions - Emerson Climate Technologies GmbH

Pascalstrasse 65 - 52076 Aachen, Germany

Tel. +49 (0) 2408 929 0 - Fax: +49 (0) 2408 929 570 - Internet: [climate.emerson.com/en-gb](https://climate.emerson.com/en-gb)

The Emerson logo is a trademark and service mark of Emerson Electric Co. Emerson Climate Technologies Inc. is a subsidiary of Emerson Electric Co. Copeland is a registered trademark and Copeland Scroll is a trademark of Emerson Climate Technologies Inc.. All other trademarks are property of their respective owners. Emerson Climate Technologies GmbH shall not be liable for errors in the stated capacities, dimensions, etc., as well as typographic errors. Products, specifications, designs and technical data contained in this document are subject to modification by us without prior notice. Illustrations are not binding.

©2019 Emerson Climate Technologies, Inc.

**EMERSON. CONSIDER IT SOLVED.™**