



MTA102RF AXIAL FAN MOTOR
 220V 50Hz 0.6A 135W 
 4 μF/450V 1380r/min CL.B

SINGLE-PHASE WIRING DIAGRAM



AXIAL FAN

HAILE ELECTRIC

Unit:axial fan motor

Type:

Motor:single phase motor with capacitor

Customer:

Motor type:MTA102RF

Customer type:

Type	Voltage V	Frequency Hz	Input power W	Current A	Speed r/min ±5%	Air volume m³/h	Noise level dBA	Capacitor μF/VDB
MTA102RF	220	50	135	0.6	1380	2280	62	4 μF/450V

Insulation class : B

Operating type: S1


Permissible ambient temperature : -30~60°C Temperature increase: ΔT≤85k

Motor protection:thermocontact 150±5°C

Bearings: ball bearings

License: CE

Model meanings:

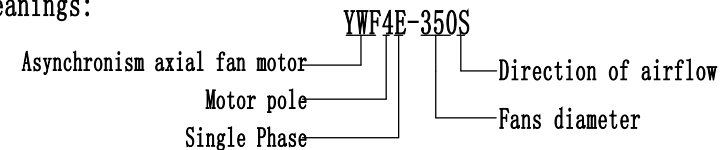

Electrical connection:lead wire 0.50mm

Direction of rotation:clockwise(sucking), Airflow direction:"S" looking at rotor side

High-voltage test according to EN 60335-1 1800V

Material/Surface treatment:rotor with condensation drain holes varnished black, stator temperature protected

Balance grade:G6.3 Fan balanced dynamically in two planes

APPROX. WEIGHT

MEANS

DRN. BY

CHD. BY

ENG. BY

APP. BY

HAILE

A4

SCALE

SHEET: of